



## Half moon single shuttle split ring (HM SSSR)

Here is more convenient way of tatting this element in comparison with [the previous version of instructions](#).


1. Tat the 1<sup>st</sup> half of the ring.

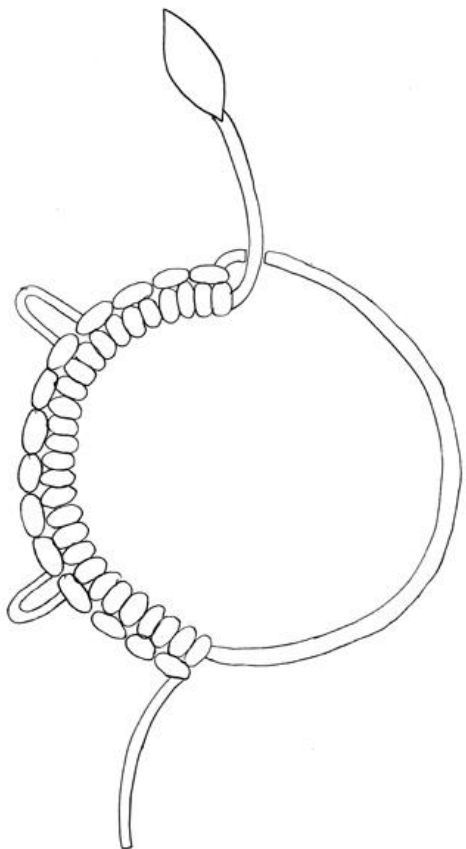


2. Wind off a part of thread from the shuttle and make a loop.

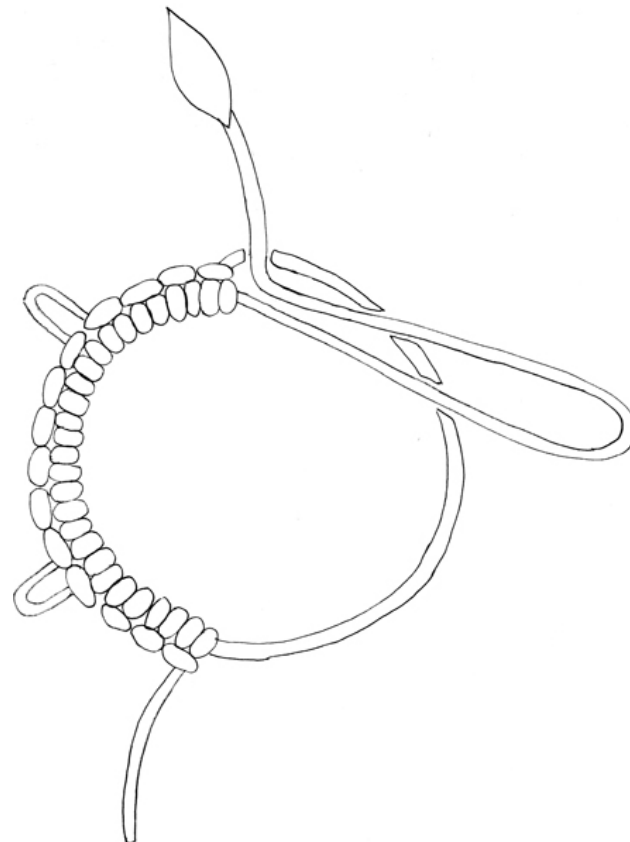

3. Make a small picot and tat the 2<sup>nd</sup> half of the ring using this loop as if it is a shuttle. The number of knots in the 2<sup>nd</sup> half of the ring is one-two less than in the 1<sup>st</sup> half (for microfibr thread these numbers are equal).

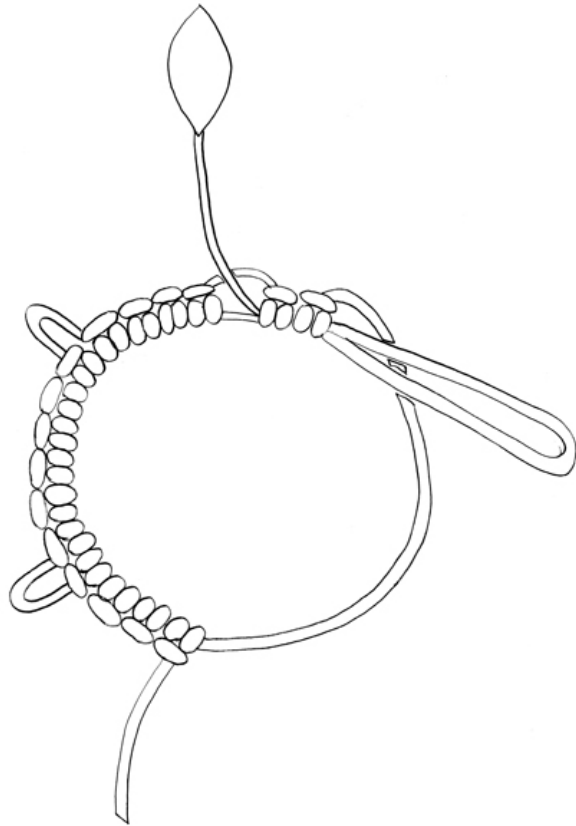

4. Turn the knots of the 2<sup>nd</sup> ring half in such way that their "hats" are facing the ring center. Pull appropriate side of the loop to tighten the ring, forming half-moon shape with your fingers.

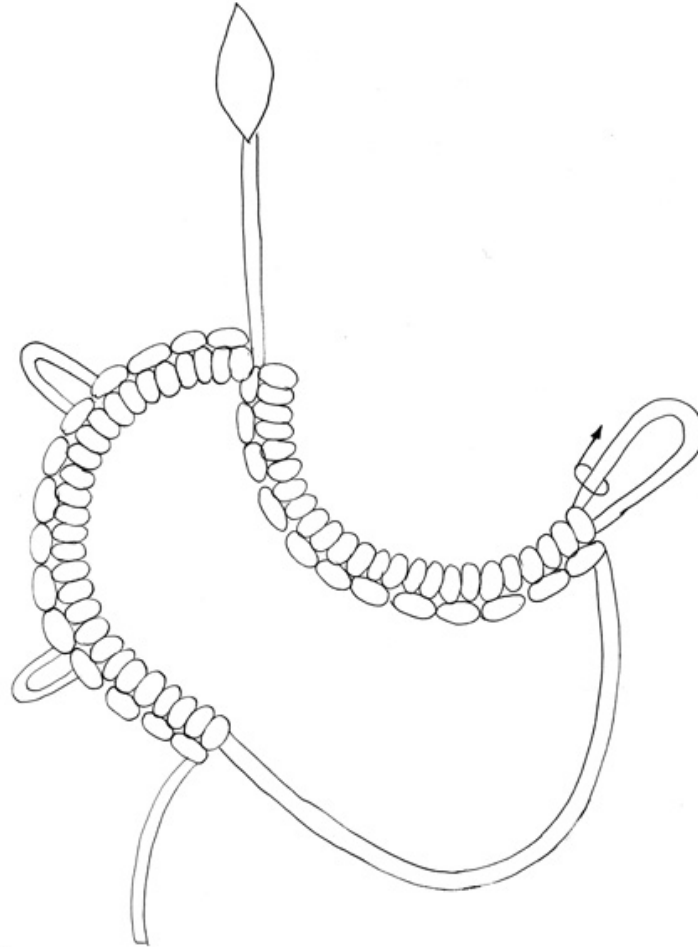

5. Pass the shuttle with the tatted element through the loop. Pull the shuttle thread and tighten the loop round ring basis.

